

# E-Lite WHITE


## HIGH PERFORMANCE WHITE FLEXIBLE TILE ADHESIVE

### TECHNICAL DATA SHEET

E-LITE WHITE is a premium grade non slip, non slump, flexible white tile adhesive designed to withstand movement in substrates.

E-LITE WHITE is the ultimate when it comes to tile adhesives, with its superior adhesion strength and flexibility. With its unique PFR light weight formulation, E-LITE WHITE out performs its opposition in every aspect of application and cost. Whether you need to tile over timber floors or inside a swimming pool E-LITE WHITE is the ultimate choice when only the best will do.

- **High performance**
- **Flexible**
- **Non Slump**
- **Extended Open Time**
- **Adhesive-meets C2S2TE classifications**
- **Suitable for Early Age Concrete**
- **Suitable for Green Screeds**
- **Can be used on Most Heated Floors**
- **Light Weight**

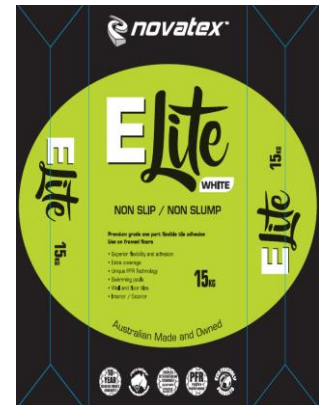

Superior coverage, ideal product for commercial applications e.g. unit blocks and large podiums

Suitable for tile on tile wall and floor applications and internal external use.

Ideal for bonding a large range of tile types including ceramic, fully vitrified, porcelain, natural stone, terrazzo, glass and mosaics

Ideal for application of tiles over Novaproof modified polyurethane waterproofing membrane

Low VOC content- meets Green Building Council of Australia Green Star IEQ-13 requirements.

**novatex**  
new generation building products

Novatex Products Pty Ltd  
ABN:55 003 032 328  
P O Box 7123  
Wetherill Park NSW 2164



Telephone: 029757 3525  
Facsimile: 02 9757 3454  
Email: [info@novatexproducts.com.au](mailto:info@novatexproducts.com.au)  
Website: [www.novatexproducts.com.au](http://www.novatexproducts.com.au)

# E-LITE WHITE

## HIGH PERFORMANCE WHITE FLEXIBLE TILE ADHESIVE

### Designed for fixing

Suitable for wall and floor applications and internal and external use.

Ideal for bonding a large range of tile types including ceramic, fully vitrified, porcelain, glass, mosaics and Terrazzo as well as natural stone (but not suitable for moisture sensitive stone like green marble and B grade terrazzo).

Ideal for application of tiles over Novaproof modified polyurethane waterproofing membrane.

### Substrates

Concrete, renders, screeds, Novaproof waterproofing membrane, block work, gyprock, plasterboard, fibre cement and some timber surfaces.

### Preparation

Ensure surfaces are sound and free from movement, oil, grease, wax, dust and any curing and release agents and any other barrier materials. Ensure surface to be tiled over is strong enough to support the weight of the tiles being fixed. Surface needs to be dry before tiling, with no residue or permanent damp.

### Concrete & Cement Render Screeds

Ensure all concrete slabs are allowed to cure for at least 7 days in accordance with AS 3958.1-2007 and have a wood float finish. The maximum variation in the plane of the concrete must not exceed 5mm in 3 meters for floors and 4mm in 2 meters for walls. Steel trowelled finished concrete surfaces must be mechanically abraded or primed first using Optimus Primer.

All render and screeded surfaces must be allowed to cure for at least 24 hrs. prior to commencing tiling

### Plaster Board /Fibre Cement Sheet Wall and Floor

Fibre cement sheeting must be the correct sheeting for the installation and be used and installed in accordance to the manufacturer's written specifications. The surface must be primed with NovaPrime. Plasterboard sheets must be the correct sheeting for the installation and be used and installed in accordance to the manufacturer's written specifications. The surface must be primed with NovaPrime.

### Timber

Before tiling over timber contact Novatex for advice regarding required preparation. Not all timber can have tiles directly bonded. If unsure install a suitable ceramic tile underlay according to the manufacturer's printed directions.

### Existing Tiles

Tiles need to be sound and clean Remove all cracked, drummy or otherwise unsound tiles and repair appropriately. Prime surfaces using Optimus Primer. Contact Novatex Products before commencing if in doubt about required surface preparation.

### Expansion & Movement Joints

Must be installed in accordance with Australian Standard AS3958.1-2007.

Movement Joints must be placed from the substrate through the tile bed up to the face of the tile.

Movement joints must be clean and free from dirt, adhesive droppings and tile spacers. They must be a minimum of 6mm wide and no wider than 10mm. they should be filled with a suitable elastomeric sealant such as Forza.

### Movement joints must be placed:

Every 4.5 metres externally and every 6 metres internally.

Around the perimeter of the floor; over existing joints in the substrate.

Where 2 different materials meet (e.g. wood and concrete).

Around fixtures in the substrate (e.g. columns).

Internal vertical corners; changes in direction of the tiling at changes in storey height.

Over existing movement joints.

As recommended by the sheet manufacturer.

See special instructions for exterior framed decks.



# E-Lite WHITE

## HIGH PERFORMANCE WHITE FLEXIBLE TILE ADHESIVE

### Priming

All porous surfaces should be primed using Nova Prime (refer to Nova Prime data sheet for correct application). Non Porous surfaces should be primed using Optimus Primer (refer to Optimus Primer data sheet for correct application)

### Mixing

15kg of E-LITE WHITE powder requires 5 litres of water  
Always add powder to liquid while mixing. Mix until lump free and uniform.  
Allow to stand for 5min and then re-stir. Adhesive is now ready to use.  
For swimming pools, add 1L of Novamix Additive per bag of E-Lite WHITE. Mix 1L of additive with 5 litres of water then mix in 15kg bag of E-Lite WHITE.

### Application

All tiling must be carried out in accordance with AS3958-2007 – A Guide to Tiling. Once the substrate has been correctly prepared, apply the adhesive onto the surface using the correct square notched trowel. Use a 6mm trowel for wall tiles up to 200x200mm. Use a 10mm trowel for tiles up to 300x 300. For tiles 300x300 and larger use a 12mm trowel. Tiles that are 400x400 and over need to be back buttered. Use the flat side of the trowel to apply adhesive to the back of the tile about 1-2mm thick. E-LITE WHITE can be applied at a bed minimum thickness between 2 to 10mm for walls and 3 to 10mm for floors. Tiles must be firmly pressed in the freshly trowelled adhesive, slide the tile at a right angle to the notch pattern to ensure 100% coverage is achieved and so there are no air gaps behind the tile.  
Tiles that are uneven or have lugs on the back to be buttered with adhesive as well.

### Grouting

Commence grouting after about 8-16 hours when tile adhesive has hardened sufficiently so that the tiles will not be dislodged. This may take longer in cool weather. Follow the directions for the Novatex grout used. Note: Always use Novamix Additive in grout on framed floors.

### Clean up

Excess adhesive can be removed using a clean damp cloth while still wet. Tools and other equipment can be cleaned up using water while the adhesive is still wet.

### Coverage

A 15kg bag of E-LITE WHITE will cover approximately 12m<sup>2</sup> on walls using a 6mm notched trowel and 7m<sup>2</sup> on floors using a 10mm notched trowel. The coverage will vary depending on substrate condition, tile type and application technique.

### Packaging

E-LITE WHITE is available in 15kg and 5kg bags.

### Shelf Life

A bag of E-LITE WHITE, when kept in a cool, dry environment, and stored above ground level, will have a shelf life of 12 months.

**novatex**  
new generation building products

# E-LITE WHITE

## HIGH PERFORMANCE WHITE FLEXIBLE TILE ADHESIVE

### Precautions

Do not apply E-LITE WHITE in temperatures below 5°C and above 35°C.

E-LITE WHITE has an open time of 25 minutes and an adjustment time of 30 minutes. Please be aware of site conditions and only spread enough adhesive so that tiles can be fixed while the adhesive is still wet.

Do not set tiles into "skinned" adhesive. Remove any skinned adhesive and reapply fresh wet material.

Seek special advice for heavy stone on walls.

Do not tile onto surfaces that are damp. Seek special advice. May not suitable for some high impact situations like hard wheeled trolleys (shopping centres) or high point loading (driveways).

Ensure that exterior tiling or tiling in wet areas has suitable falls to avoid ponding.

Protect tiling from water, rain and bad weather until at least 24 hours after grouting.

For applications or situations not mentioned in this data sheet please contact Novatex Products Pty Ltd.

For a full MSDS for E-LITE WHITE please contact Novatex Products Pty Ltd.

E-LITE WHITE being cement based is alkaline in nature, and therefore may cause dermatitis. It is recommended that applicators wear PVC gloves or similar and safety goggles.

### Technical data

Colour	WHITE
Mixing Ratio	Approx. 5 L water per 15kg powder
Application Properties at 23°C and 50% RH	
Open Time	20 minutes
Adjustment time	30 minutes
Grouting time	8 hours
Ready for use	24 hours (21 days in pools)
Pot life	1 hours
Suitable for Under floor heating	Yes (seek special advice)
Mechanical Properties (AS/ISO13007.1)	
Tensile Adhesion Strength after 28 days dry	1.7MPA
Water immersion	1.1MPA
Heat	1.8MPA
Freeze Thaw	1.1MPA
Specific Gravity	1.4kg per litre
Classification	C2S2TE

### Contact Us

For further technical information, please contact Novatex Products on 02 9757 3525.

